



SERVING THE TRADE SINCE 1954




SCAFFOLDING PANELS AND ACCESSORIES

MANUFACTURED FROM HIGH STRENGTH STEEL TUBE
PERIMETER JOINTS COPED AND WELDED
PLATED/PAINTED FINISH ON PANEL LOCKS
ALL PANELS DRILLED FOR EASY PINNING
ALL PANELS HAVE POWDER-COATED FINISH

ALL SCAFFOLD TUBING IS 1.69" OUTSIDE
DIAMETER WITH .095" WALL UNLESS
STATED OTHERWISE

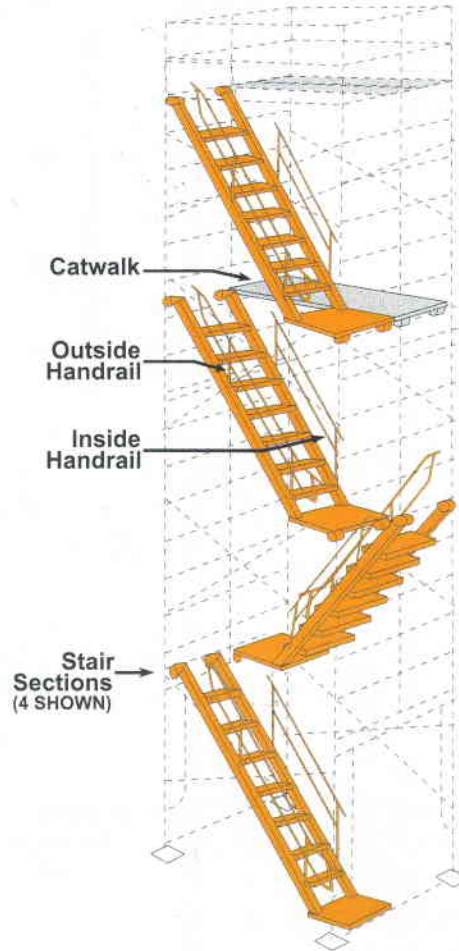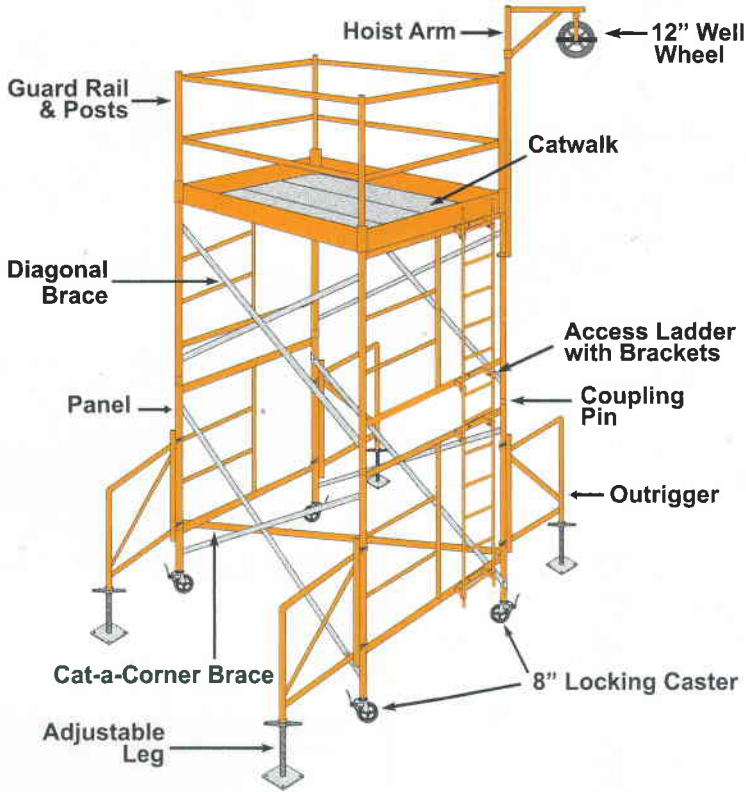




2 OF THESE + 2 OF THESE + 4 OF THESE = BASIC UNIT
COUPLING PINS WITH
SPRING RETAINER INSTALLED








Follow all applicable ANSI, OSHA, etc. codes and regulations for use of this equipment
All drawings are for illustration purposes only. Copyright © 2016 ABLE Export, LLC.

7475 N.W. 63rd STREET • MIAMI, FL 33166-3603
MIAMI (305) 592-5940 • WATS 1-800-831-4564 • FAX (305) 592-2793
WEBSITE - <http://www.AbleExport.com>
LINKS: www.AbleBuilders.com, www.Escora.com, www.Andamio.ws
E-MAIL: Sales@AbleExport.com

PANELS

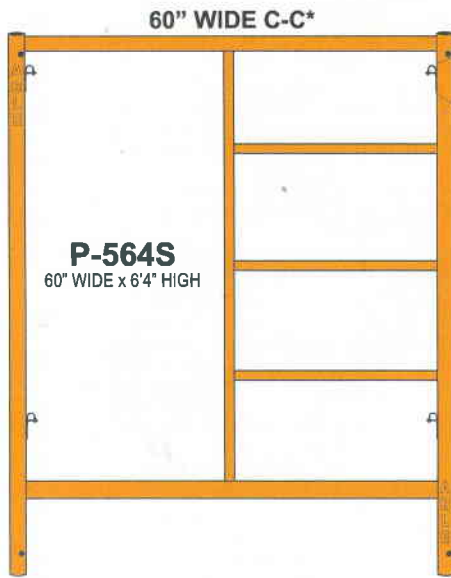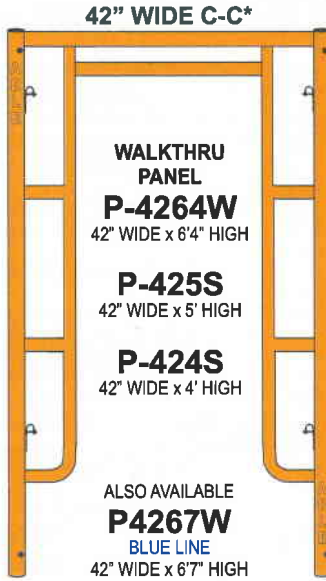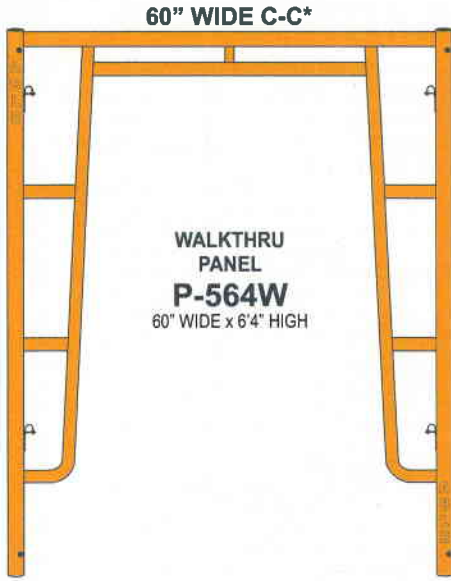

COUPLING PIN WITH
SPRING RETAINER
INSTALLED

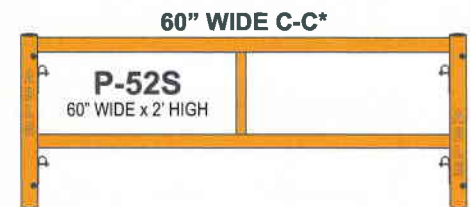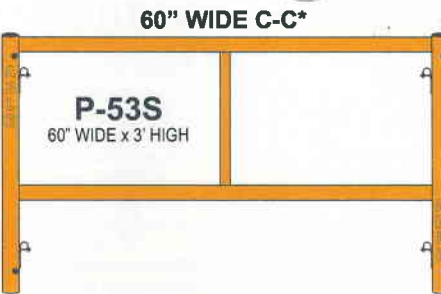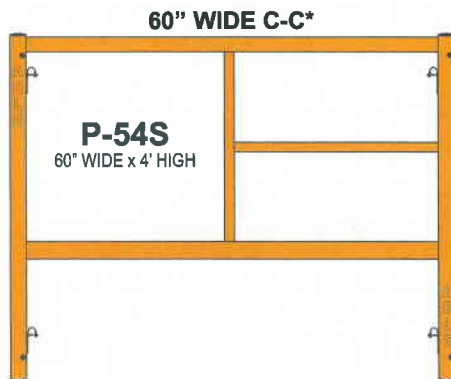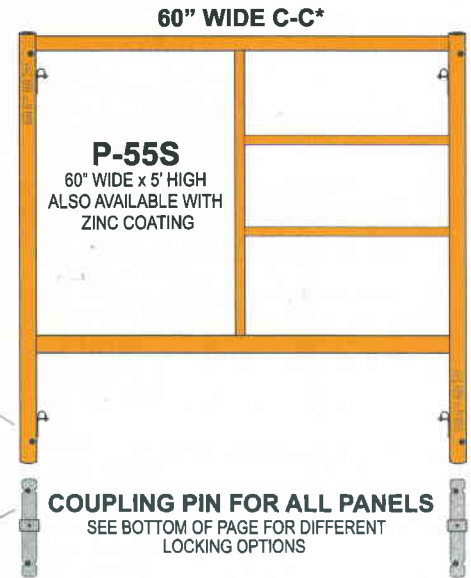

*C-C = Center to Center

Follow all applicable ANSI, OSHA, etc. codes and regulations for use of this equipment
All drawings are for illustration purposes only. Copyright © 2016 ABLE Export, LLC.




ACCESSORIES

SIDE BRACKET



SB-20
SB-24
SB-30


OUTRIGGER

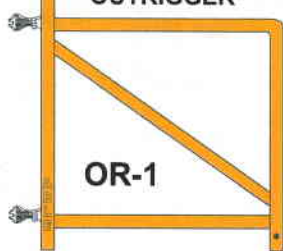

OR-1

**CATWALK
CW-7A**


7' SPAN
Aluminum Frame
Plywood Deck (Replaceable)

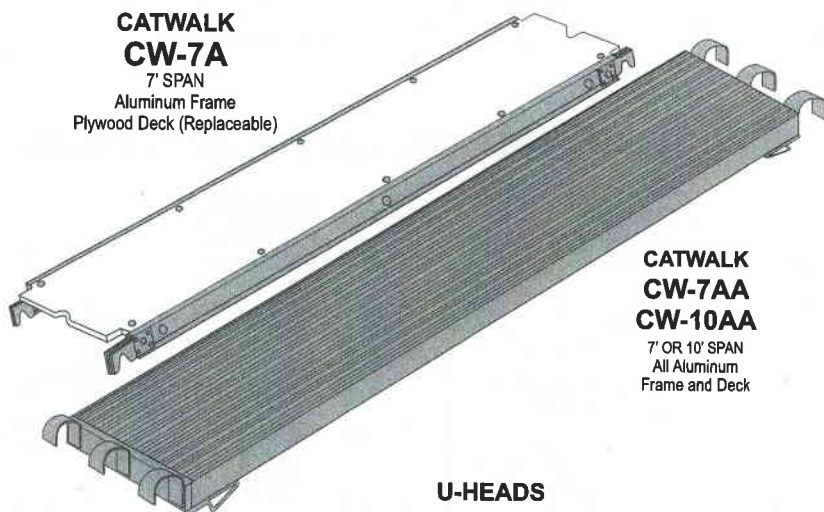

**CATWALK
CW-7AA
CW-10AA**

7' OR 10' SPAN
All Aluminum
Frame and Deck

U-HEADS




UH-1S
6" x 11"

UH-2S
8.5" x 11"

ACCESS LADDER

AL-5
AL-6

5' OR 6 LADDER

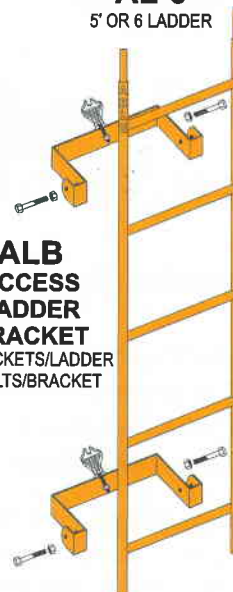

**ALB
ACCESS
LADDER
BRACKET**

2 BRACKETS/LADDER
2 BOLTS/BRACKET




**WELL WHEEL
HA-WW12**

12" heavy duty Well Wheel
for up to 1" rope to hoist
materials.

**HOIST ARM
HA-1**

Fits over coupling pin on frame.
(Maximum capacity = 250 lbs.)
360° swivel.


**8" LOCKING
CASTER
C-8**

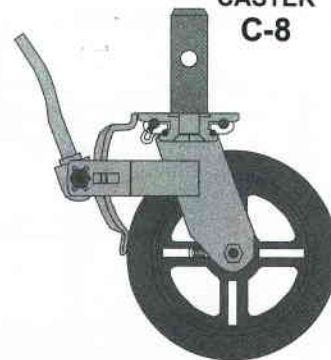


Important Rule: Always lock wheel and pin caster stem before and during use.

ADJUSTABLE LEGS


BASE PLATE




BP-1

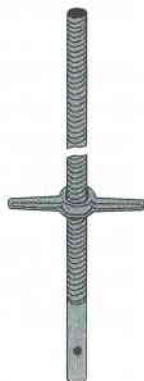

AL-P

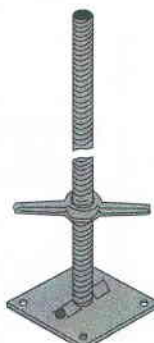

AL-S



AL-BP

Follow all applicable ANSI, OSHA, etc. codes and regulations for use of this equipment
All drawings are for illustration purposes only. Copyright © 2016 ABLE Export, LLC.



TUBING CLAMPS AND ACCESSORIES, MORTAR BOARD AND BAKER / PERRY STYLE PRODUCTS FOR INDOOR USE.

TUBE & CLAMP



TC-RA (I-BOLT)
RIGHT ANGLE



TC-S (I-BOLT)
SWIVEL




TC-RAT (T-BOLT)
RIGHT ANGLE




TC-ST (T-BOLT)
SWIVEL



TC-SW
SCAFFOLD WRENCH
REVERSING RATCHET




TC-SJP
EXPANDABLE JOINT PIN



MBS
MORTAR BOARD
STAND

THE BASIC "ALL PURPOSE UNIT" (APUW)




Featuring the integrated spring-loaded pin system for fast assembly and "no surprises" operation.

All-steel construction • 6' long platform of 5/8" plywood, adjusts every 4" • Locking, swivel casters are 5" weight-over-center • Built to easily fit through standard doors. (Guardrails and outriggers, as shown below, are sold separately.) 1,000 lb capacity.

APUGRS

SET OF 4 GUARDRAILS:
2 FIXED SIDE RAILS AND
2 END RAIL GATES

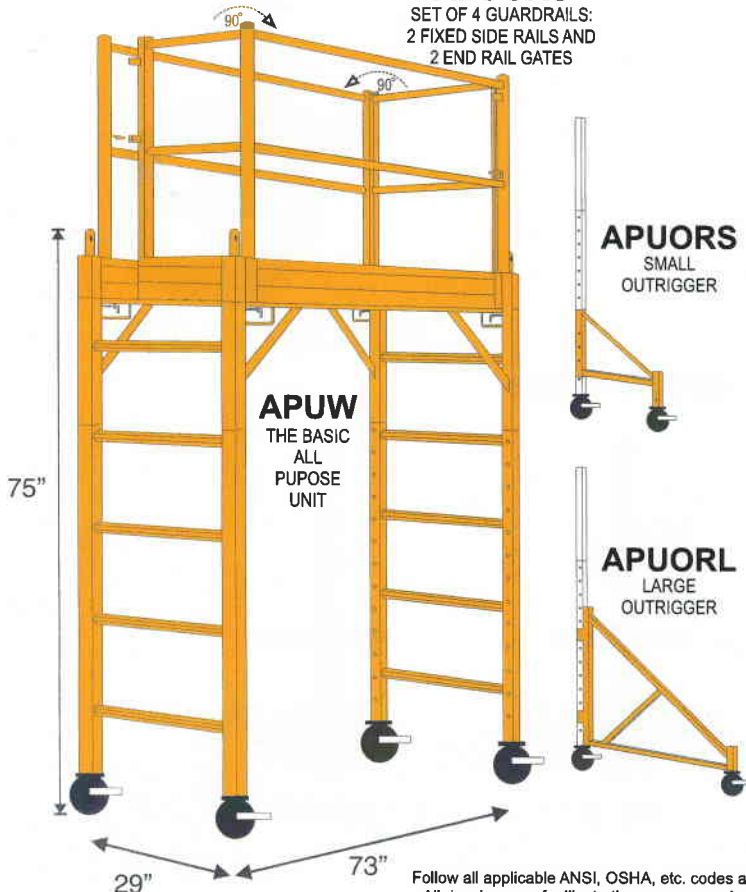

PORTABLE FOLD-UP MINI-SCAFFOLDS



Both the 6' 3" and the 4' 4" models of the Portable Fold-Up Mini-Scaffold feature strong 1" (2.5 cm) outside diameter tubular steel frames and an electrostatically applied epoxy coating.

The 6" model is 75" tall, including the housing for the 5" wheels, 73" wide and 29" deep. Three 14 gauge (2 mm) solid steel scaffold planks are standard.

The 4" model is 52" tall, including the housing for the 4" wheels, 42.5" wide and 21" deep. Two 14 gauge (2 mm) solid steel planks.


Follow all applicable ANSI, OSHA, etc. codes and regulations for use of this equipment
All drawings are for illustration purposes only. Copyright © 2016 ABLE Export, LLC.



BRACES

DIAGONAL BRACE

(Legend: "B" for "Brace"- ## inches between locks - 5', 7' or 10' length)

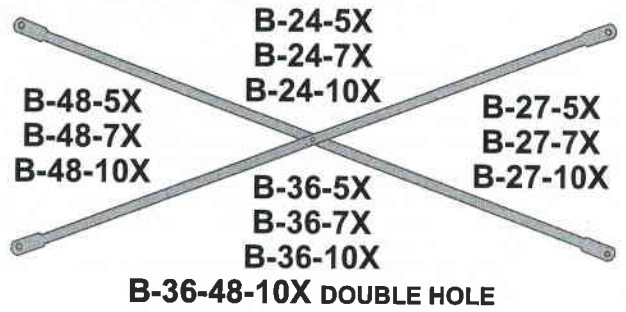


STAIR SECTION
SR-5
SR-64'
 STAIR SECTIONS FOR
 5' AND 64" PANELS



**OUTSIDE
 HANDRAIL**
SR-50OR
SR-64OR

**INSIDE
 HANDRAIL**
SR-50IR
SR-64IR

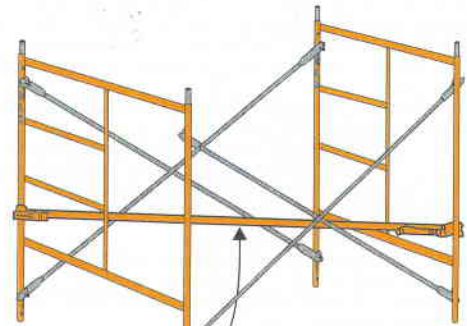


CAT-A-CORNER BRACE
B-57-D

Important Rule: When assembling rolling tower, always use CAT-A-CORNER braces on the panels sections. This prevents the tower from "racking" (getting out of square). CAT-A-CORNER braces must be used at the bottom and at every 20'.

GUARD RAIL
 2', 3', 42", 5', 7' OR 10' SPAN



36" TIE BAR
TBR 36



**QL-1
 QUICK
 LOCK**

GUARD RAIL POST

GRPK
 WITH KICKER


GRP
 WITHOUT KICKER



POST SHORE - F Series MEDIUM DUTY - COVERED THREAD

PUNTALES DE METAL AJUSTABLES - Serie F SERVICIO MEDIANO - ROSCA CUBIERTA

Adjustment with pin and covered thread



Our most popular and affordable medium duty model Post Shore with covered threads, tube collar with 2 handles (ears), captured 9/16" (13mm) pin, 4.33" x 4.33" x .197" (110mm x 110mm x 5mm) end plates, painted red. Available with reinforced base.


Nuestro modelo de puntal de servicio mediano más popular y accesible, con roscas cubiertas, cuello tubular con dos agarraderas, pasador capturado de 13mm (9/16"), placas de extremo de 110mm x 110mm x 5mm (4.33" x 4.33" x .197"), pintado de rojo. Disponible con base reforzada.

ABLE

EXPORT, LLC
7475 NW 63rd Street
Miami, FL 33166-3603
Miami: (305) 593-2253
Fax: (305) 592-2793
USA WATS: 1-800-831-4564

AMERICAN SYSTEM
SISTEMA E.U.A.

METRIC SYSTEM
SISTEMA MÉTRICO

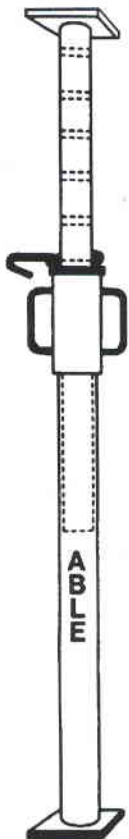

	Length/Longitud:	5'1" to/a 9'0"	1.55m to/a 2.74m
PS-1F 2,000/20' CONT. Special Order	External tube/Tubo externo: 2.20" x .079" x 4'9" Internal tube/Tubo interno: 1.89" x .079" x 5'1" Weight/Peso: 20.9 lbs./libras	2.20" x .079" x 4'9" 1.89" x .079" x 5'1" 20.9 lbs./libras	56 x 2 x 1,500mm 48 x 2 x 1,550mm 9.3kgs/kilogramos
PS-2F 1,750/20' CONT.	External tube/Tubo externo: 2.20" x .079" x 5'9" Internal tube/Tubo interno: 1.89" x .079" x 6'1" Weight/Peso: 21.7 lbs./libras	2.20" x .079" x 5'9" 1.89" x .079" x 6'1" 21.7 lbs./libras	56 x 2 x 1,800mm 48 x 2 x 1,850mm 9.7kgs/kilogramos
PS-3F 1,600/20' CONT.	External tube/Tubo externo: 2.20" x .079" x 6'6" Internal tube/Tubo interno: 1.89" x .079" x 7'2" Weight/Peso: 24.5 lbs./libras	2.20" x .079" x 6'6" 1.89" x .079" x 7'2" 24.5 lbs./libras	56 x 2 x 2,000mm 48 x 2 x 2,180mm 11.0kgs/kilogramos
PS-4F 500/20' CONT.	External tube/Tubo externo: 2.20" x .098" x 7'9" Internal tube/Tubo interno: 1.89" x .098" x 8'5" Weight/Peso: 35.2 lbs./libras	2.20" x .098" x 7'9" 1.89" x .098" x 8'5" 35.2 lbs./libras	56 x 2.5 x 2,400mm 48 x 2.5 x 2,600mm 15.9kgs/kilogramos

ALLOWABLE LOADS IN LBS:

CARGAS PERMISIBLES EN KGS:


SAFETY FACTOR = 3:1 FACTOR DE SEGURIDAD = 3:1

HEIGHT /ALTURA	5' 1.52m	6' 1.83m	7' 2.13m	8' 2.44m	9' 2.74m	10' 3.05m	11' 3.35m	12' 3.66m	13' 3.96m	14' 4.27m	15' 4.57m
PS-1F	6,200 2,812	6,200 2,812	5,500 2,495	4,800 2,177	4,100 1,860						
PS-2F		6,200 2,812	5,500 2,495	4,800 2,177	4,100 1,860	3,400 1,542	2,700 1,225				
PS-3F				4,800 2,177	4,100 1,860	3,400 1,542	2,700 1,225	2,350 1,066	2,050 930		
PS-4F						3,400 1,542	2,700 1,225	2,350 1,066	2,050 930	1,775 805	1,575 714

POST SHORE - B Series HEAVY DUTY - EXPOSED THREAD

PUNTALES DE METAL AJUSTABLES - Serie B SERVICIO PESADO - ROSCA EXPUESTA

Adjustment with pin and levered handle



Heavy duty model Post Shore with exposed thread, cast collar with single lever type handle, end plates 4.75" x 4.75" x .32" (140mm x 140mm x 8mm), painted green.

Optional: Reinforced base, pin on cable.

Modelo de puntal de servicio pesado con roscas expuestas, cuello colado con una sola agarradera tipo palanca, placas extremo 140mm x 140mm x 8mm (4.75" x 4.75" x .32"), pintado de verde.


Opcional: Base reforzada, sujetador en cable.

ABLE

EXPORT, LLC
7475 NW 63rd Street
Miami, FL 33166-3603
Miami: (305) 593-2253
Fax: (305) 592-2793
USA WATS: 1-800-831-4564

AMERICAN SYSTEM
SISTEMA E.U.A.

METRIC SYSTEM
SISTEMA MÉTRICO



	Length/Longitud:	External tube/Tubo externo:	Internal tube/Tubo interno:	Weight/Peso:
PS-1B 1,000/20' CONT. Special Order	5'9" to/a 10'3"	2.36" x .146" x 5'5"	1.89" x .150" x 5'7"	38 lbs./libras
PS-2B 800/20' CONT.	6'6" to/a 11'0"	2.36" x .146" x 5'5"	1.89" x .150" x 6'5"	41.7 lbs./libras
PS-3B 800/20' CONT.	8'6" to/a 13'0"	2.36" x .146" x 6'8"	1.89" x .150" x 7'2"	45.6 lbs./libras
PS-4B 450/20' CONT.	10'6" to/a 16'0"	2.36" x .146" x 6'7"	1.89" x .150" x 10'5"	56.1 lbs./libras

ALLOWABLE LOADS IN LBS:

CARGAS PERMISIBLES EN KGS:

SAFETY FACTOR = 3:1 FACTOR DE SEGURIDAD = 3:1

HEIGHT / ALTURA	5'	6'	7'	8'	9'	10'	11'	12'	13'	14'	15'
	1.52m	1.83m	2.13m	2.44m	2.74m	3.05m	3.35m	3.66m	3.96m	4.27m	4.57m
PS-1B	10,600 4,808	9,800 4,445	8,800 3,992	7,800 3,538	6,800 3,084						
PS-2B			7,300 3,311	7,150 3,243	7,000 3,175	5,600 2,540	4,200 1,905				
PS-3B					6,500 2,948	6,200 2,812	5,950 2,698	4,600 2,086	3,350 1,519		
PS-4B						7,000 3,175	6,450 2,925	5,900 2,676	4,500 2,041	3,600 1,632	2,500 1,133

SERVING THE CARIBBEAN REGION SINCE 1954




Tube & Clamp

The **ABLE** brand Clamp - traditional design made to contemporary standards. Available as either a fixed (90 degree) or swivel clamp, each side handles tubing from 1 5/8" to 2" held in place by a 1/2" galvanized steel nut. Below are the 90 degree fixed clamps and the 360 degree swivel clamps, available with "T" bolt or "I" bolt. "T" bolt has an easily replaceable nut and bolt. "I" bolt has 12 ridges to securely hold pipe in place to prevent slippage.




TC-RA (I-BOLT)

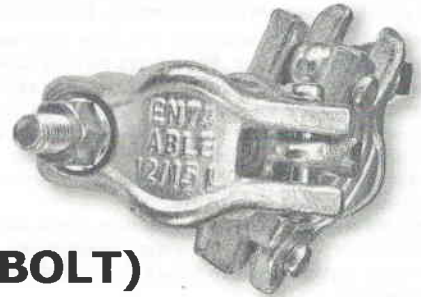

TC-S (I-BOLT)



TC-RAT (T-BOLT)

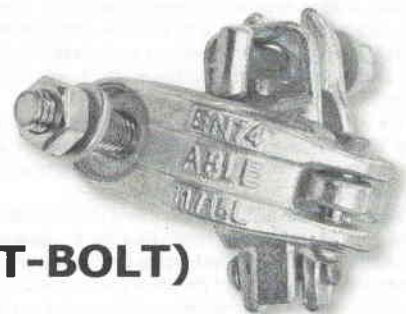

TC-ST (T-BOLT)

Specifications:

90 degree, fixed right angle clamp, drop forged

Tube & Clamp Right Angle

	TC-RA	TC-RAT
Weight:	3.3 lbs./1.49 kgs.	2.1 lbs./0.95 kgs.
Packaging:	20 pcs/bag	25 pcs/bag

Specifications:

360 degree swivel clamp, drop forged

Tube & Clamp Swivel

	TC-S	TC-ST
Weight:	3.8 lbs./1.49 kgs.	2.4 lbs./0.95 kgs.
Packaging:	20 pcs/bag	25 pcs/bag



EXPORT, LLC

7475 NW 63rd Street
Miami, FL 33166-3603
Miami: (305) 593-2253
Fax: (305) 592-2793

USA WATS: 1-800-831-4564
WEB SITE: www.AbleExport.com
E-MAIL: sales@AbleExport.com